


Tolérances	
Ø D	H 11
Ø D >120	H 10
Ø d	h 10
Ø d >120	h 11
-	-
-	-

Chanfrein	
Ø d	-
0-60	-
60-120	-
120-180	-
180-250	-
250-400	-

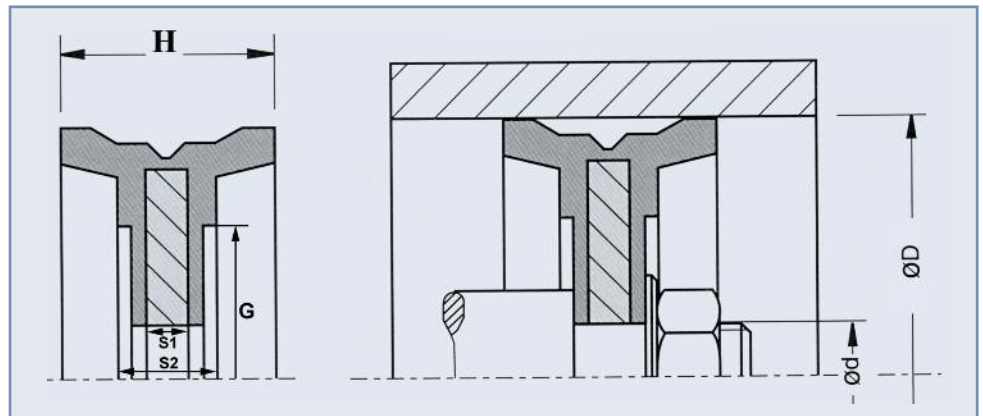

MATIERE
NBR

PRESSION
10 Bar

VITESSE
0,5 m/s

TEMPERATURE
- 30 °C ; + 110 °C

D	d	H	G	S1	S2	D	d	H	G	S1	S2
25	8	12	15	3	4	65	12	25	40	5	7,5
32	8	15	19	3	6	70	12	22	49	6	8
40	10	18	21	5	7	80	16	24	55	6	9
50	10	18	21	5	7	100	20	26	74	9	12
60	12	22	39	5	9	125	20	26	94	9	12
63	16	22	43,5	6	9	160	27	30	128	11	14
63	12	22	42	5	9	200	27	35	168	11,5	14,5

h = hauteur à titre indicatif du joint